

DETROIT RADIANT PRODUCTS CO.

White Rodgers 1F77-51 Thermostat



Range
40°F to 80°F

Differential
3°F Fixed

Contact Action
Opens on rise

Electrical Rating
24-277 VAC
22 AMP
Non-inductive


Dimensions
Height: 2.75"
Width: 4.5"
Depth: 2.5"

Operation
Single-stage
High voltage


Additional Features

- Separate 5-day (weekday) and 2-day (weekend) programming.
- 2 "AA" alkaline batteries included.
- Three temperatures for four separate time settings per 24-hours
- Temperature override until next program period.
- Manual program override (hold temperature).

TYPICAL WIRING DIAGRAMS

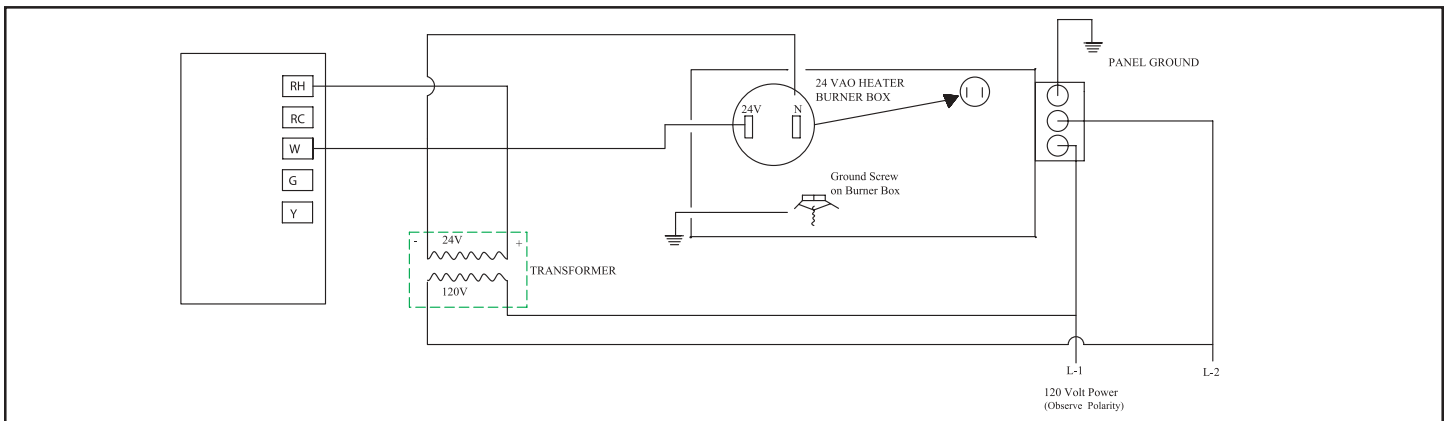

Single-stage heaters with a 1F77-51 thermostat. Single heater, single thermostat. Picker Relay (relay board) is installed.

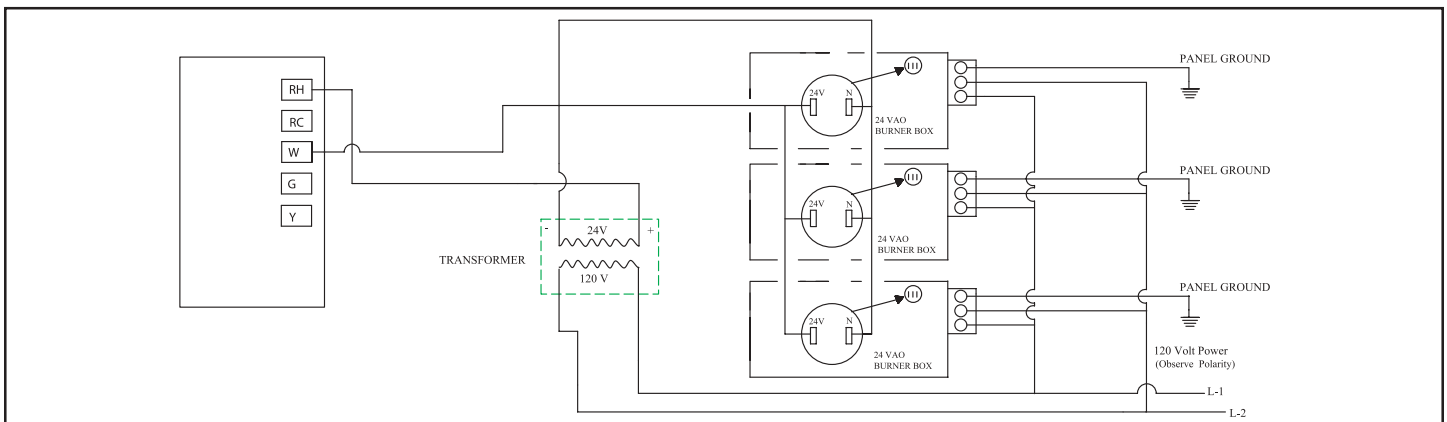

Single-stage heaters with a 1F77-51 thermostat. Multiple heaters, single thermostat. Picker Relays (relay boards) are installed.



Printed in U.S.A.

© 2006 Detroit Radiant Products Co.
21400 Hoover Rd., Warren, MI 48089
T. (586) 756-0950 F. (586) 756-2626
www.detroitradiant.com
Form# LSH-12/05 (DRP)